

XGT® **40V** max


HIGH CAPACITY CHARGING

BCC01

**HIGH
CAPACITY
BATTERY FITMENT**
ACCOMODATES UP TO 8
BATTERIES AT ONCE



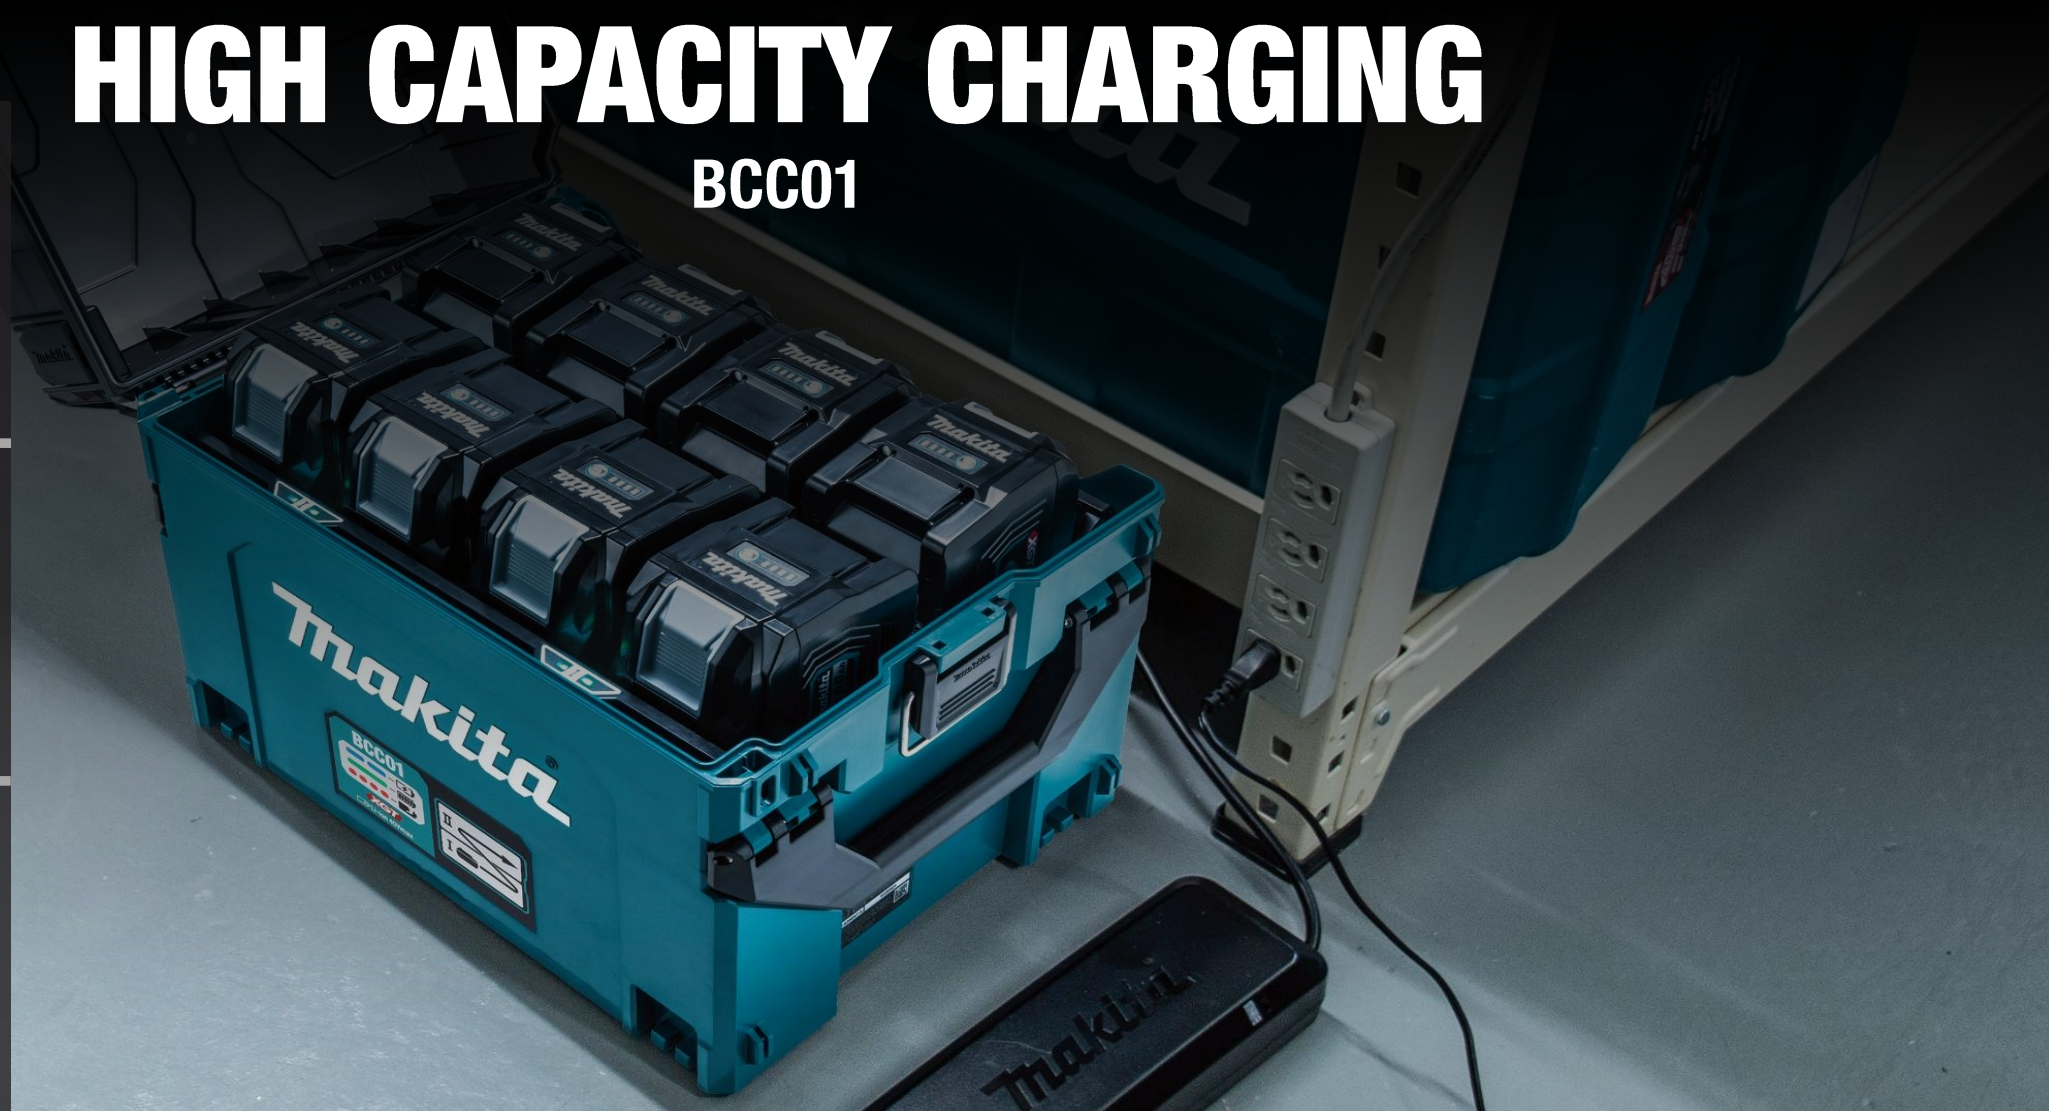


**SIMULTANEOUS
MULTI-PORT
CHARGING**
UP TO 4 BATTERIES
SIMULTANEOUSLY

**AUTO-
SWITCHING**
BETWEEN BATTERIES WHILE
CHARGING



Makita XGT CHARGER RANGE

XGT 40V | 80V_{max}

	DC40RA	DC40WA	DC40RB	BCC01	BCC02
					
NUMBER OF CHARGING PORTS	1	2	2	8	12
MAX CHARGING CURRENT	6.3A (XGT) 12A (LXT)	1.1A	6.3A (XGT) 12A (LXT)	1.6A (XGT) 2.1A (LXT)	1.6A (XGT)
SIMULTANEOUS CHARGING	1 Battery	2 Batteries	2 Batteries	4 Batteries	4 Batteries
BATTERY COMPATIBILITY *with ADP10	BL4020, BL4025, BL4040, BL4040F, BL4050F, BL4080F, BL1830B*, BL1840B*, BL1850B*, BL1860B*	BL4020, BL4025, BL4040, BL4040F, BL4050F, BL4080F, BL1830B*, BL1840B*, BL1850B*, BL1860B*	BL4020, BL4025, BL4040, BL4040F, BL4050F, BL4080F, BL1830B*, BL1840B*, BL1850B*, BL1860B*	BL4020, BL4025, BL4040, BL4040F, BL4050F, BL4080F, BL1830B*, BL1840B*, BL1850B*, BL1860B*	BL4020, BL4025, BL4040, BL4040F
CHARGING TIME	BL4020 – 22min BL4025 – 28mm BL4040 – 45min BL4040F – 45min BL4050F – 50min BL4080F – 76min	2 x BL4020 – 110min 2 x BL4025 – 130mm 2 x BL4040 – 210min 2 x BL4040F – 210min 2 x BL4050F – 260min 2 x BL4080F – 420min	2 x BL4020 – 22min 2 x BL4025 – 28mm 2 x BL4040 – 45min 2 x BL4040F – 45min 2 x BL4050F – 50min 2 x BL4080F – 76min	4 x BL4020 – 75min 4 x BL4025 – 90mm 4 x BL4040 – 145min 4 x BL4040F – 145min 4 x BL4050F – 175min 4 x BL4080F – 280min	4 x BL4020 – 75min 4 x BL4025 – 90mm 4 x BL4040 – 145min 4 x BL4040F – 145min
VOLTAGE	40	40	40	40	40
ADP10 COMPATABLE	YES	NO	YES	YES	NO

SPECIFICATIONS

CHARGING PORTS	8
CHARGING CURRENT	1.6A (XGT), 2.1 (LXT)
SIMULTANEOUS CHARGING	4 Batteries
BATTERY CAPABILITY *with ADP10	BL4020, BL4025, BL4040, BL4040F, BL4050F, BL4080F, BL1830B*, BL1840B*, BL1850B*, BL1860B*
DIMENSIONS (LxWxH)	295mm x 407mm x 320mm
VOLTAGE	40
ADP10 COMPATIBLE	YES

HIGHLIGHTS



PERFORMANCE

Charge up to four XGT or LXT batteries simultaneously (LXT using ADP10 adaptor).



ADAPTABILITY

Remove the cover entirely to maintain easy access to batteries when in confined spaces.



EFFICIENCY

Automatically chooses the least charged batteries when fully loaded and features automatic switching once charge cycles are complete



VERSATILITY

Allows fitment of up to 8x 40Vmax XGT 8.0Ah batteries at once with LED lights to indicate charging status

FEATURES

SIMULTANEOUS CHARGING: Charge up to four XGT or LXT (with ADP10) batteries simultaneously for maximum efficiency.

AUTOMATIC SWITCHING: Automatically switches battery charging once a full cycle is complete.

OVERNIGHT CHARGING: Optimized for overnight charging, ensuring that batteries are fully charged and ready to go by morning, allowing professionals to start their workday without delays.

8 CHARGING PORTS: Accommodates 8 batteries at once – charge 40Vmax XGT batteries or 18V LXT Batteries (LXT with the use of the ADP10 adaptor) for versatile compatibility

LED CHARGING INDICATORS: Clear LED indicators show charging status for each port, even with the lid closed.

TOOL-LESS REMOVEABLE COVER
Undo the latch either side of the case to remove the cover.



HIGH CAPACITY FITMENT
Carry up to 8x 8ah XGT batteries at one time.



MAKPAC COMPATIBLE
Stack and fasten on to other Makita MACPAC modular cases for easy storage.

BCC01 INCLUDED ACCESSORIES



DC4002 POWER SUPPLY CORD

OPTIONAL ACCESSORIES



ADP10 18V LXT BATTERY CHARGER ADAPTER



BL4020 40VMAX XGT 2.0Ah BATTERY



BL4025 40VMAX XGT 2.5Ah BATTERY



BL4040 40VMAX XGT 4.0Ah BATTERY



BL4040F 40VMAX XGT 4.0Ah HIGH OUTPUT BATTERY



BL4050F 40VMAX XGT 5.0Ah HIGH OUTPUT BATTERY



BL4080F 40VMAX XGT 8.0Ah HIGH OUTPUT BATTERY