
TOSHIBA



SHORAI



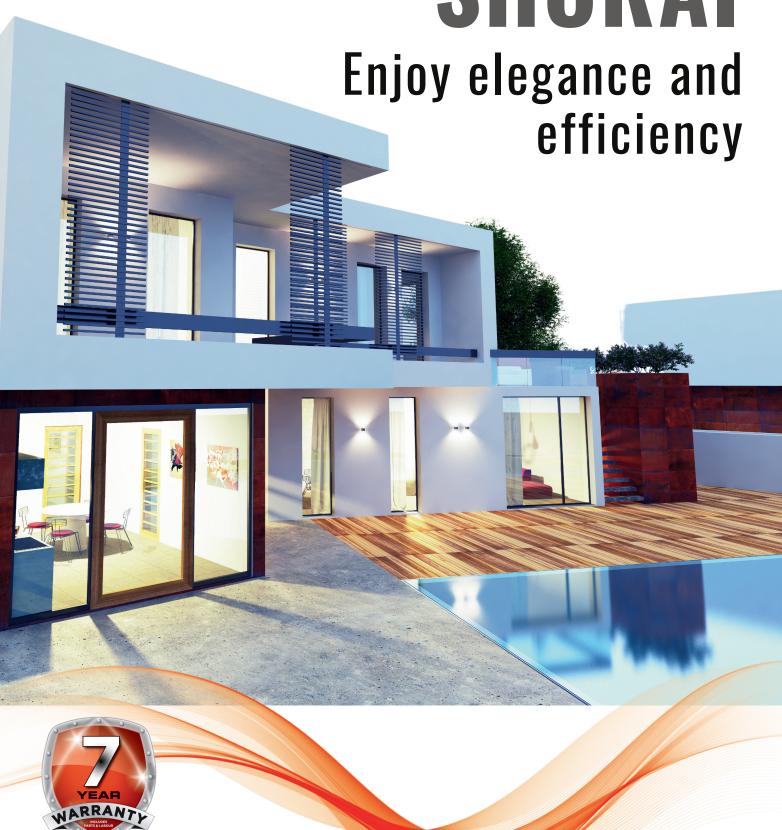

Treat yourself to Japanese quality



Beautify your interior with a new stylish, contemporary design. With its straight line, matt finish and invisible piping pre-cuts, the new SHORAI Edge fits perfectly with any interior.

Designand Reliability

Innovation, efficiency, high reliability, energy savings — These are powerful values at the heart of everything we do at Toshiba. For over 50 years, Toshiba has been providing its customers with the precision and expertise of Japanese Quality.

InnovativeInverter Technology Toshiba's

innovative rotary compressor technology combines exemplary performance with outstanding reliability. Minimising fluctuations to ensure a constant temperature, it increases efficiency while significantly reducing the risk of incidental noise. Toshiba's Inverter allows SHORAI Edge to regulate heating and cooling capacity at all times, by adjusting the compressor speed.



Innovation well being


Ultra Pure Filter PM2.5 purification 94% efficiency

- PM2.5 refers to particulate matters originating from atmospheric pollution that have a diameter of less than 2.5 micrometers.
- Studies have found a close link between exposure to fine particles and lung disease or worsening chronic disease.
- Toshiba's Ultra Pure filter captures up to 94% of PM2.5, creating healthy living spaces at home (1).

(1) Nantong deli purification equipment factory Co, Ltd.

After shutting down moisture 30 minutes of fan operation after shutting down

stays trapped



The fan operation after shut down helps dry water droplets to keep the coils dry and clean

Self-Cleaning

Reduces Moisture. Reduces mould formation. Fan will turn off after 30 mins of unit shutdown.

HADA Care Flow

(cooling mode)

Set louver position to generate indirect air flow to user, with better air distribution to homogenize room temperature.


Air distribution distance up to 7m



Test room condition length >10m*

Toshiba HADA Care mode makes stressfree condition for beauty skin.

Skin mositure shifting with operating air conditioner



HADA Care AC operation Normal AC operation



Feeling of Freshness


Built-in Air-Ionizer

In forests, waterfalls, lakes, and streams, negative ions make the air fabulously fresh, clean, and relaxing. exceptional atmosphere emulated in spas and health clubs. Now, you can enjoy this magical ambiance in your own home through the Air-Ionizer.

Magic and easy



Improved comfort

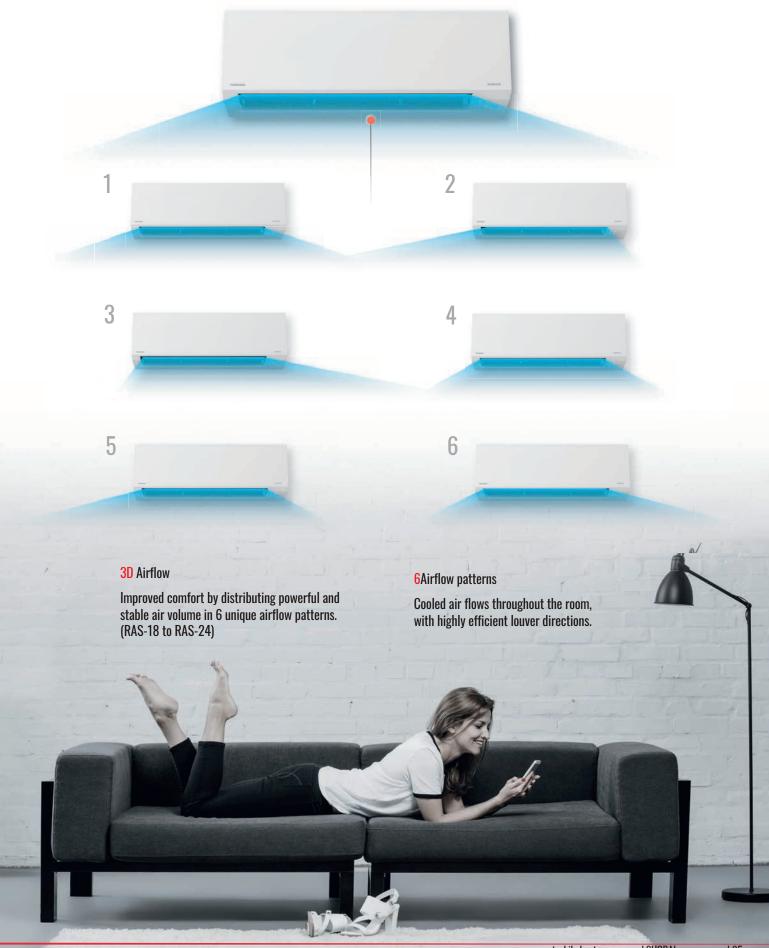

IR Remote and Smart APP

HADA Care

Set louver position to generate indirect air flow to user, with better air distribution to homogenize room temperature.

3D Airflow

The unit boasts a 3D smart airflow system, with independent louvers and 6 patterns for greater comfort (only sizes 18. 22 & 24).

Silent Operation (outdoor unit)

The unique noise reduction function of the outdoor unit minimizes disruption to the neighbourhood.

Quiet mode (indoor unit)

Press FAN button to adjust speed and reach Quiet Mode to operate at low noise level.

Weekly timer

Weekly timer allows to set «on and off» times or program settings every 24 hours. Up to 4 different settings/days and 7 different programs in a week.





Smart App

Customise your comfort, finding the perfect cooling or heating level for your family at any time, no matter where you are. When at home, simply replace your infrared remote control with the intuitive smart app. This also gives you easy access to your air conditioner while you are on the move, allowing you to adapt your comfort to lifestyle!

* Optional Extra





CHUDVI			RAS-07EKVSG-A	RAS-10EKVSG-A	RAS-13EKVSG-A	RAS-16EKVSG-A	RAS-18EKVSG-A	RAS-22EKVSG-A	RAS-24EKVSG-A
SHUNAL			RAS-07E2AVSG-NZ	RAS-10E2AVSG-NZ	RAS-13E2AVSG-NZ	KAS-IBEZAVSG-NZ	RAS-18E2AVSG-NZ	RAS-22E2AVSG-NZ	RAS-24E2AVSG-NZ
Cooling Capacity - Rated	CO	kW	2.00	2.50	3.50	4.20	5.00	6.00	7.10
Cooling Capacity - Range	CO	kW	0.80 - 2.80	0.80 - 3.60	0.80 - 4.20	0.80 - 5.00	1.10 - 6.50	1.50 - 7.50	1.50 - 8.20
Power input [rated (min - max)]	CO	kW	0.53 (0.19 - 0.84)	0.60 (0.19 - 1.07)	0.85 (0.22 - 1.13)	1.13 (0.25 - 1.56)	1.30 (0.24 - 2.10)	1.57 (0.28 - 2.10)	2.0 (0.30 - 2.60)
Operating current [rated (min - max)]	CO	A	2.75 (1.02 - 4.19)	3.05 (1.02 - 5.22)	4.75 (1.35 - 5.50)	5.85 (1.47 - 7.30)	6.60 (1.52 - 10.40)	7.75 (1.68 - 9.75)	9.65 (1.80 - 12.70)
AEER	CO		3.81	4.21	3.98	3.77	3.83	3.77	3.41
Heating Capacity - Rated	RC	kW	2.50	3.20	3.70	5.40	5.80	6.90	8.00
Heating Capacity - Range	RC	kW	0.70 - 4.00	0.90 - 4.80	0.90 - 5.60	1.30 - 6.20	1.00 - 7.70	1.00 - 8.50	1.70 - 9.20
Power input [rated (min - max)]	RC	kW	0.55 (0.17 - 1.28)	0.73 (0.18 - 1.58)	0.82 (0.19 - 1.54)	1.43 (0.24 - 1.92)	1.40 (0.19 - 2.25)	1.69 (0.22 - 2.34)	2.07 (0.30 - 2.40)
Operating current [rated (min - max)]	RC	Α	2.80 (0.91 - 6.20)	3.65 (0.96 - 7.30)	4.65 (1.14 - 7.30)	6.90 (1.44 - 9.25)	7.00 (1.15 - 10.40)	8.25 (1.37 - 11.25)	9.97 (1.80 - 11.75)
ACOP	RC		4.31	4.47	4.38	3.71	4.05	3.91	3.71
Indoor Unit									
Airflow Volume (High/Mid/Low)	CO	m³/hr	830/600/390	770/450/300	820/560/360	850/560/360	1120/900/730	1220/950/740	1370/1120/740
Mositure removal		I/hr	0.80	1.30	1.80	2.80	3.20	3.50	4.00
Dimension (WxLxH)		mm	293 x 800 x 226	320 x 1053 x 245	320 x 1053 x 245	320 x 1053 x 245			
Net Weight		kg	9	10	10	10	14	14	14
Indoor Noise (H/M+/M/L+/L/Quite) (Cooling) (dB)			42/37/33/29/26/25	42/39/33/29/26/25	45/41/37/33/30/29	47/44/40/36/32/31	45/43/40/37/34/32	46/44/41/38/35/33	49/47/44/41/36/34
Indoor Noise(H/M+/M/L+/L/Quite) (Heating) (dB)			42/38/34/30/26/25	42/39/33/29/26/25	45/41/38/33/31/30	48/45/41/37/33/32	46/43/41/37/34/32	46/44/41/38/35/33	50/46/43/38/35/34
Outdoor Unit									
Dimension (WxLxH)		mm	240 x 660 x 530	290 x 780 x 550	300 x 800 x 630	300 x 800 x 630			
Net Weight		kg	22	28	34	34	34	41	41
Cooling Operating range (Outside)	CO	∘ C	`-10 ~ 46	`-10 ~ 46	`-10 ~ 46	`-10 ~ 46	`-10 ~ 46	`-10 ~ 46	`-10 ~ 46
Heating Operating range	RC	o C	`-15 ~ 24	`-15 ~ 24	`-15 ~ 24	`-15 ~ 24	`-15 ~ 24	`-15 ~ 24	`-15 ~ 24
Outdoor Noise (Rated/Quite) (Cooling)		(dB)	47/45	48/46	49/47	50/48	53/51	55/53	55/53
Outdoor Noise(Rated/Quite) (Heating)		(dB)	50/48	50/48	51/49	52/50	53/51	54/52	55/53
, ,, ,,									
Pipe Size									
Liquid Side		(mm)	0.05	6.35	6.35	6.35	6.35	6.35	6.35
Gas Side		(mm)	6.35 9.52	9.52	9.52	12.70	12.70	12.70	12.70
Maximum Piping Length		(m)	9.52 15	20	20	20	20	25	25
Maximum Piping Height difference		(m)	12	12	12	12	12	15	15
Chargeless Length		(m)	15	15	15	15	15	15	15
Compressor type		()	Twin Rotary	Twin Rotary	Twin Rotary				
Power Supply	٧	/ph/Hz	220-240V/1Ph/50Hz	220-240V/1Ph/50Hz	220-240V/1Ph/50Hz	220-240V/1Ph/50Hz	220-240V/1Ph/50Hz	220-240V/1Ph/50Hz	220-240V/1Ph/50Hz





TOSHIBA

SHORAI

EDGE

Toshiba is committed in improving its products to ensure the highest quality and reliability standards, and to meet local regulations and market requirements.

Product specification in this Brochure are only indicative and are subject to change. These are not intended to be used in place of the engineering or installation databook / manual.

All specification and features are subject to change without prior notice.
All images provided in this catalogue are used for illustration purpose only.

Cooling and heating capacities mentioned are at standard operating conditions.

Date: August 2021

Equipment rates in accordance with GEMS 2019 Determination

Auckland Head Office 207-211 Station Road Penrose, Auckland Tel: 09 355 6720 sales@ahi-carrier.co.nz

> Napier Branch 31 Ford Road Napier Tel: 06 561 0183 sales@a<u>hi-carrier.co.nz</u>

Wellington Branch Cnr Jarden Mile & McCormack Place Ngauranga, Wellington Tel: 04 473 5985 sales@ahi-carrier.co.nz

Christchurch Branch
23 Iversen Terrace Waltham,
Christchurch
Tel: 03 379 0894
sales@ahi-carrier.co.nz

Dunedin Branch 56 Fox Street Dunedin Tel: 03 552 0401 sales@ahi-carrier.co.nz

