




The Wiser IP Camera Indoor provides day and night HD video recording, with 340° panning view, motion detection notification alerts, intercom and event or continuous recording. Simple and intuitive control via the Wiser by SE App from anywhere. Use standalone or integrate into the Wiser smart home system and Automations. It can be mounted on the ceiling or placed on a table top.



Wiser IP Camera Indoor

Identification	
Commercial reference	PDL723419
Product or component type	Camera
Product colour	White
Power	
Power supply	5 VDC, 2 A
Nominal power for AC adaptor	100-240 VAC, 50/60 Hz
Characteristics	
Communication interface	Wi-Fi®- 2.4 GHz, IEEE802.11 b/g/n compliant
Security	Wi-Fi®- WPA-PSK /WPA2-PSK Data - AES128
Connector type	Micro USB port for the AC adaptor
Transmission capacity	Maximum 100 mW
Camera	1/2.9" CMOS sensor 80° horizontal and 40° vertical wide-angle lens 0° - 340° pan angle -75° to +75° tilt angle F2.1 focal length 7 m IR range Full HD camera with night vision Motion detection and motion tracking Integrated patrol function with 340° recording option 2-way audio communication Screen flip function available, specially useful when installed on ceilings Supports time watermark, to record videos with date and time stamp
Motion detection range	7 m in radius max
Operating frequency	2405 - 2480 MHz
Image/Video	1080 P resolution Supports image snapshot, event recording and continuous recording.
Local storage support	Micro SD Card, max. 128 GB (not included)
Installation	
Dimensions	Ø 56 x 73 x 134 mm
Weight	298 g
Material	Plastic
Environment	
Operating temperature	-10 °C to 45 °C
Storage temperature	-20 °C to 60 °C
Operating humidity	≤ 95 % DH
Functions and settings	
<ul style="list-style-type: none"> • Supports snapshot and video recording on micro SD card. • Option to choose between 1-way and 2-way communication. • Option to activate motion tracking. • Can control the pan and tilt angles of the camera (via app). • On detecting motion, sends notifications and snapshots. • Can be integrated into automations created via Wiser by SE app. 	

Dimensions (mm)

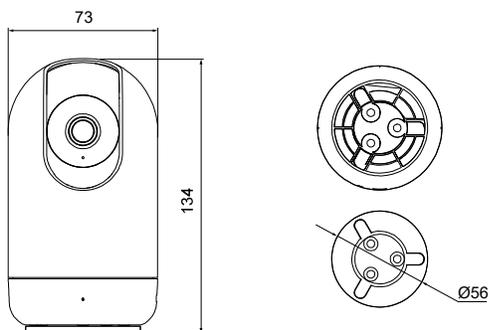

Note:

Download the Wiser by SE app to your smartphone, and install the Wiser Hub to configure and control Wiser devices. You can use the app to pair, set up and control Wiser devices. The Wiser by SE app is available in the App stores for smartphones supporting operating systems Android™ OS (version 7 and above) or Apple® iOS (version 11 and above).

For more detailed information, refer to the on-line system user guide. Scan the QR code or follow the link: <https://www.productinfo.schneider-electric.com/pdl/>



Technical Characteristics

Wiser IP Camera



Download

Wiser by SE app



The Wiser IP Camera Outdoor provides day and night HD video recording, with wide angle view, motion detection notification alerts, intercom and event or continuous recording. Simple and intuitive control via the Wiser by SE app from anywhere. Use standalone or integrate into the Wiser smart home system and Automations. With adjustable camera position and IP56 protection, it can be installed on a wall or ceiling/eave to suit any home.



Wiser IP Camera Outdoor

Identification

Commercial reference	PDL724419
Product or component type	Camera
Product colour	White

Power

Power supply	12 V DC, 1 A DC power adaptor
Nominal power for AC adaptor	100-240 VAC, 50/60 Hz

Characteristics

Communication interface	Wi-Fi® - 802.11b/g/n, 2.4GHz
Security	Wi-Fi® - WPA/WPA2, WPA-PSK/WPA2-PSK Data - AES128
Transmission capacity	Maximum 100 mW
Camera	1/2.7" Color CMOS sensor, 2 Megapixels (MP) 128° diagonal, 103° horizontal, and 54° vertical Wide-angle lens Up to 10 m IR range Digital zoom function Full HD camera with night vision Motion detection, push notifications and recording Motion detection with area configuration Can be installed on wall or ceiling Supports time watermark, to record videos with date and time stamp
Motion detection range	10 m in radius max
Operating frequency	2405 - 2480 MHz
Audio communication	Semi duplex
Image/Video	H.264 video compression 1080 P resolution Image snapshot, event recording and full-time recording
Local storage support	Micro SD Card, max. 128 GB (not included)

Installation

Dimensions	149,7 x 77 mm
Weight	220 g
Material	Plastic
Protection class	IP56


Environment

Operating temperature	-20 °C to 60 °C
Storage temperature	-30 °C to 85 °C
Operating humidity	20 % ~ 95 % non-condensing

Functions and settings

- Supports snapshot and video recording on micro SD card.
- Support digital zoom, image snapshot, motion detection recording and full-time recording.
- On detecting motion, sends notifications and snapshots.
- Can be integrated into automations created via Wiser by SE app.

Dimensions (mm)

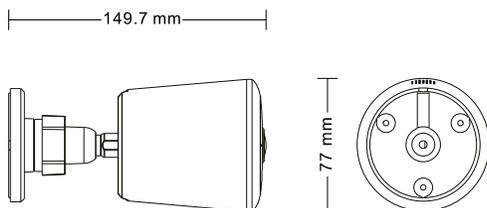

Note:

Download the Wiser by SE app to your smartphone, and install the Wiser Hub to configure and control Wiser devices. You can use the app to pair, set up and control Wiser devices. The Wiser by SE app is available in the App stores for smartphones supporting operating systems Android™ OS (version 7 and above) or Apple® iOS (version 11 and above).

For more detailed information, refer to the on-line system user guide. Scan the QR code or follow the link: <https://www.productinfo.schneider-electric.com/pdl/>

