




THE **LXT** ADVANTAGE

Today, LXT® is the preferred cordless tool system on commercial and residential job sites, boasting one of the industry's largest collection of 18V tools and accessories. Makita® continues to set the bar when it comes to premium power and run-time, ensuring that the LXT® system delivers durable, dependable, high performance tools needed to complete any job.




THE **LXT** ADVANTAGE



LXT® BATTERY
UP TO **50% MORE RUN TIME**¹

Battery delivers constant power and run time in extreme temperatures, even in winter (20°C). Equipped with Star Protection Computer Controls™ to protect against overload, over-discharge, and overheating.

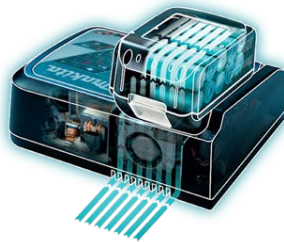

RAPID OPTIMUM CHARGER
UP TO **3X FASTER CHARGING**²

The Makita® Rapid Optimum Charger communicates with the battery's built-in chip throughout the charging process to optimise battery life by actively controlling current, voltage and temperature.

¹ Vs. Makita® 18v Ni-Cd Battery. ² Vs. Makita® 18v Ni-Cd Charger.


THE **LXT** ADVANTAGE





STAR PROTECTION
COMPUTER CONTROLS™
**EFFICIENT POWER
MANAGEMENT**³

The demanding applications you take on every day are also demanding on your cordless tools and batteries. You rely on your tools, so Makita created Star Protection Computer Controls™.

³ Vs. Makita® Cordless Motors with Brushes. ⁴ Protection against Overloading, Over-Discharging & Overheating.

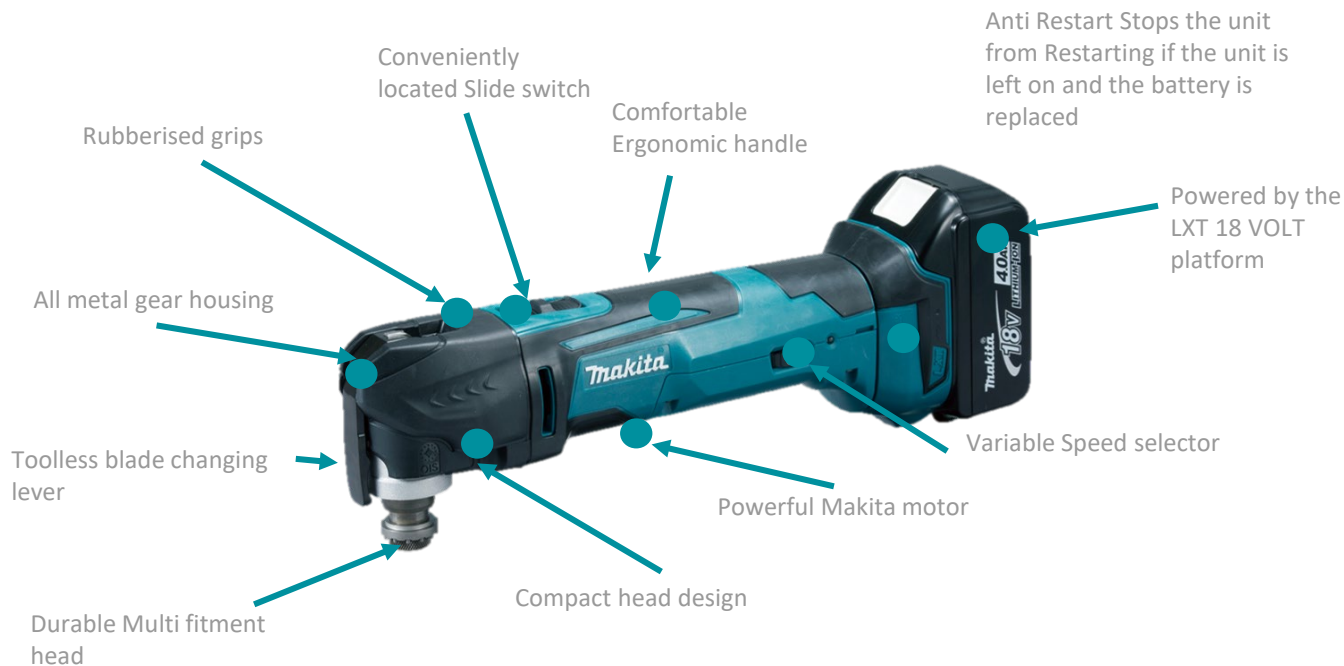

Tool less blade changing lever



OIS fitment head




**DTM51RTE
X5**

Supplied with 2x 5.0Ah batteries (BL1850B), charger, 5pc access. & case

DTM51Z

Skin tool only (No Accessories)

Model	DTM51
Battery voltage: V	18 V
Max output power: W	390 w
Oscillation angle, left/right: degree [°]	1.6 (3.2 total)
Oscillations per minute: opm=min ⁻¹	6,000 - 20,000
Switch	Slide
Low battery warning light	Yes
Variable speed control by dial	Yes
Toolless Blade removal	Yes
AFT Anti-Restart Function	Yes
Soft Start	Yes
XPT (eXtreme Protection Technology)	Yes

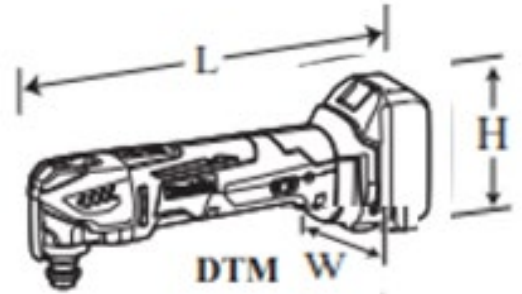

Dimensions: mm (")	
Length (L)	340 (13-3/8)
Width (W)	80 (3-1/8)
Height (H)	122 (4-13/16)

DTM51 18V Cordless Multi Tool


- Toolless clamp system for fast accessory installation
- Variable speed control dial (6,000-20,000 OPM) enables user to match the speed to the application
- 3.2° Oscillation angle engineered for faster, more aggressive cutting and sanding
- 12 Angle settings at every 30° from 0° to 360°
- Easy-to-operate slide switch increases productivity and allows for continuous use
- Accepts standard Oscillating Interface System (OIS) accessories
- Compact design allows access to restricted work areas
- Anti-restart function prevents accidental start-up
- Small diameter barrel grip for easy handling
- Battery capacity warning system turns on indicator light and is engineered to automatically stop motor to notify user when it is time to recharge the battery
- Lightweight for reduced operator fatigue
- Soft start feature for smooth start-ups
- Dust extraction system is available as an option for aggressive dust removal in applications with sanding pad
- Ideal for wood flooring, tile, plaster, sheetrock, wood, PVC and a variety of other applications
- Battery protection circuit protects against overloading, over-discharging and overheating

DESIGN



Toolless accessory clamp for quick installation and replacement

DESIGN

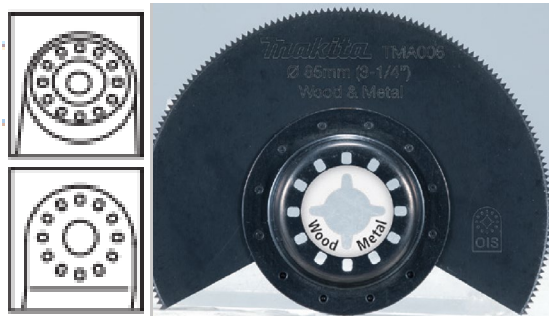

Fitment head has been designed to accommodate BOSCH (OIS) fitting and allows blades to be positioned in multiple positions on the head

DESIGN



Compact head design allows unit to be used in compact spaces

DESIGN




Rubberised grips provide comfortable operation for prolonged use

CONTROL



User can access 6 individual (6,000-20,000 OPM)) oscillation speeds to match the needs of the task

CONTROL

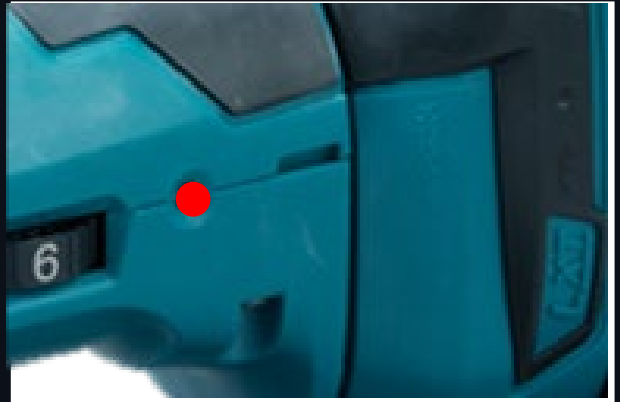


Low battery warning light lets user know when battery is depleted

INNOVATION



Unit harnesses the power of the LXT battery platform which is compatible with over 270 LXT tools

INNOVATION

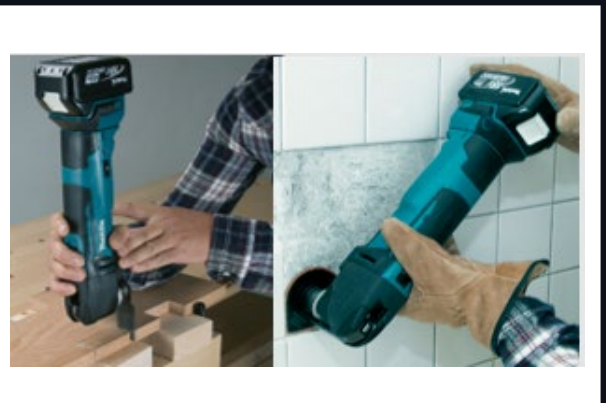

Handle design and grip positions allow user to comfortably use the unit in multiple positions

DESIGN



Variable speed control dial (6,000-20,000 OPM) enables user to match the speed to the application

CONTROL



Unit is compatible with a wide range of blades and bits to tackle a wide range of tasks

INNOVATION



Anti restart means the unit will not automatically restart if battery is removed and replaced and the switch is left in the on position


HM GRIT REMOVER



- HM Grit Remover blades

- <https://www.makita.co.nz/accessories/item/multitool-173>


HM SANDING PLATE

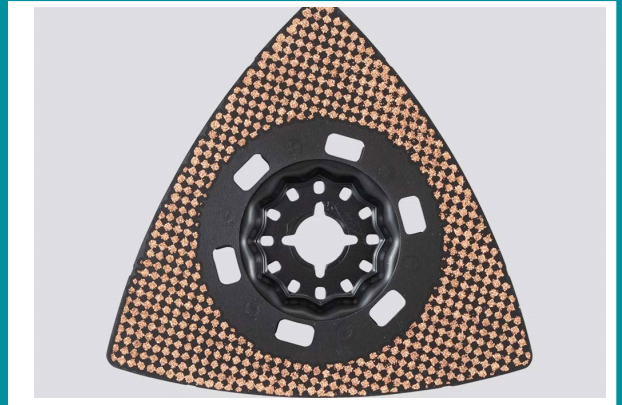

- HM Sanding Plate

- <https://www.makita.co.nz/accessories/item/multitool-174>

TC Plunge Cut

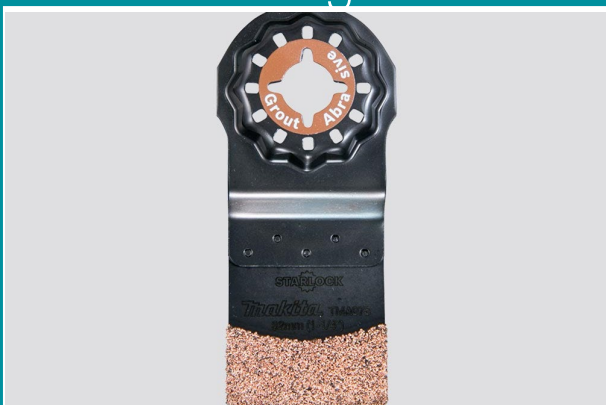

- TC Plunge Cut blades

- <https://www.makita.co.nz/accessories/item/multitool-175>

JOINT CUTTER



- General Joint Cutter - HCS

- <https://www.makita.co.nz/accessories/item/multitool-176>

DIAMOND SEGMENTED




- Diamond Segmented blades
- <https://www.makita.co.nz/accessories/item/multitool-177>

TC BAR PLUNGE



- TC Bar Plunge Blade
- <https://www.makita.co.nz/accessories/item/multitool-645>

Plunge Cut blades

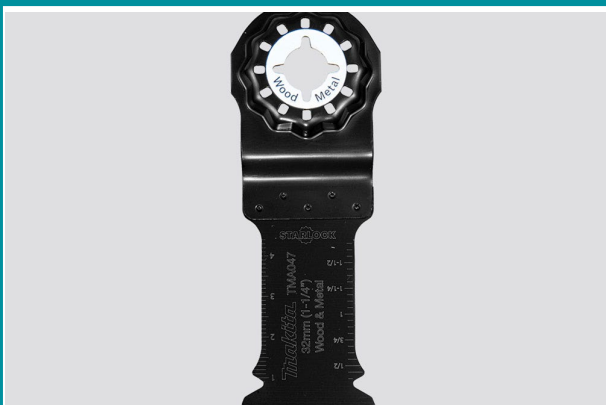

- Plunge Cut blades
- <https://www.makita.co.nz/accessories/item/multitool-7>

SEGMENTED CUT



- Segmented Cut blades

- <https://www.makita.co.nz/accessories/item/mu/ltitool-169>

ROUND CUT



- Round Cut blades

- <https://www.makita.co.nz/accessories/item/mu/ltitool-170>

SCRAPER BLADES



- Scraper blades

- <https://www.makita.co.nz/accessories/item/mu/ltitool-171>

TC SEGMENTED



- TC Segmented blades

- <https://www.makita.co.nz/accessories/item/mu/ltitool-172>

P-70378



- Adapter 27mm Quick System 447L
- <https://www.makita.co.nz/accessories/item/sanding-503>

195547-1



- 22 mm front cuff

38 MM 4 M HOSE



- P-84084 Suction hose ϕ 32mm x 4m black AS cpl.

28 MM HOSES



- A-34235 28 mm 1.5 m
- 195437-5 28 mm 2.5 m
- 195433-3 28 mm 3.5 m
- 195436-7 28 mm 5 m

Dust Nozzle



- Dust Extracting Attachment (196765-1)

WORK GLOVES



- B-90205 Gloves Pro Contractors Medium
- B-90211 Gloves Pro Contractors Large
- B-90227 Gloves Pro Contractors X-Large

ADAPTOR



- 192349-3 Joint 25

LXT 18V 1.5AH



- **BL1815N** 18V 1.5Ah Lithium-Ion Battery
- <https://www.makita.co.nz/products/model/BL1815N>

LXT 18V 3.0AH



- **BL1830** 18V 3.0Ah Lithium-Ion Battery
- <https://www.makita.co.nz/products/model/BL1830>

LXT 18V 4.0AH



- **BL1840B** 18V 4.0Ah Lithium-Ion Battery
- <https://www.makita.co.nz/products/model/BL1840B>

LXT 18V 5.0AH



- **BL1850B** 18V 5.0Ah Lithium-Ion Battery
- <https://www.makita.co.nz/products/model/BL1850B>

LXT 18V 6.0 Ah



- **BL1860B** 18V 6.0Ah Lithium-Ion Battery
- <https://www.makita.co.nz/products/model/BL1860B>

LXT RAPID CHARGER



- **DC18RC** 14.4-18V LXT Lithium-Ion Rapid Optimum Charger
- <https://www.makita.co.nz/products/model/DC18RC>

18V STANDARD CHARGER



- **DC18SD** 7.2-18V Standard Charger
- <https://www.makita.co.nz/products/model/DC18SD>

DUAL PORT RAPID



- **DC18RD** 14.4-18V Dual Port Rapid Charger
- <https://www.makita.co.nz/products/model/DC18RD>