

**TOSHIBA**



# SHORAI

Enjoy elegance and  
efficiency







# Treat yourself to Japanese quality



## SHORAI EDGE


Beautify your interior with a new stylish, contemporary design. With its straight line, matt finish and invisible piping pre-cuts, the new SHORAI Edge fits perfectly with any interior.

### Design and Reliability

Innovation, efficiency, high reliability, energy savings – These are powerful values at the heart of everything we do at Toshiba. For over 50 years, Toshiba has been providing its customers with the precision and expertise of Japanese Quality.

### Innovative Inverter Technology

Toshiba's innovative rotary compressor technology combines exemplary performance with outstanding reliability. Minimising fluctuations to ensure a constant temperature, it increases efficiency while significantly reducing the risk of incidental noise. Toshiba's Inverter allows SHORAI Edge to regulate heating and cooling capacity at all times, by adjusting the compressor speed.

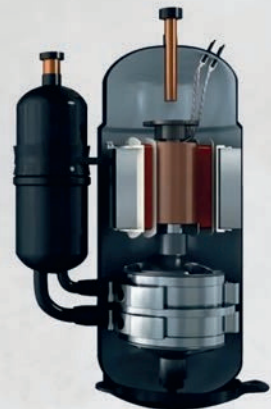

# Innovation well being

## Ultra Pure Filter

PM2.5 purification 94% efficiency

- PM2.5 refers to particulate matters originating from atmospheric pollution that have a diameter of less than 2.5 micrometers.
- Studies have found a close link between exposure to fine particles and lung disease or worsening chronic disease.
- Toshiba's Ultra Pure filter captures up to 94% of PM2.5, creating healthy living spaces at home (1).

(1) Nantong deli purification equipment factory Co, Ltd.




## Feeling of Freshness

### Built-in Air-Ionizer

In forests, waterfalls, lakes, and streams, negative ions make the air fabulously fresh, clean, and relaxing. The exceptional atmosphere is emulated in spas and health clubs. Now, you can enjoy this magical ambiance in your own home through the Air-Ionizer.

## Self-Cleaning


Reduces Moisture.  
Reduces mould formation.  
Fan will turn off after 30 mins of unit shutdown.

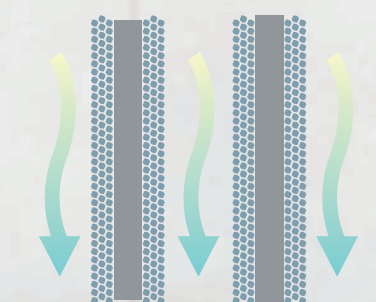


## HADA Care Flow

(cooling mode)

Set louver position to generate indirect air flow to user, with better air distribution to homogenize room temperature.

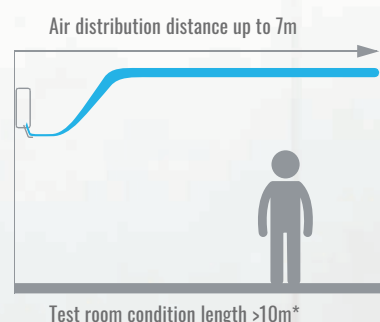

Toshiba HADA Care mode makes stressfree condition for beauty skin.

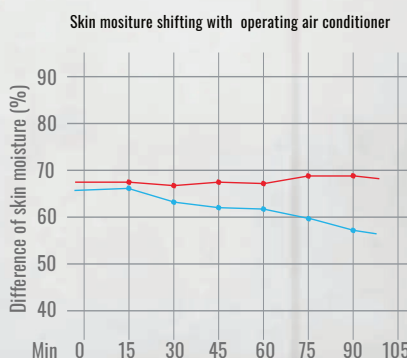



HADA Care AC operation

Normal AC operation



# Magic and easy

## WASH

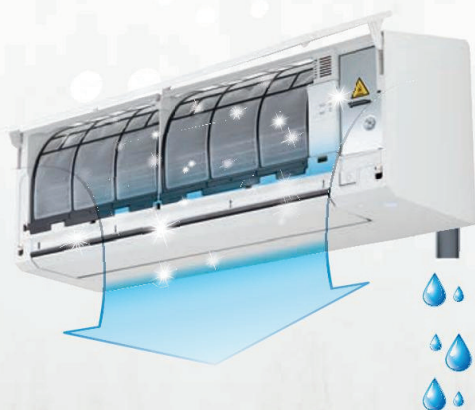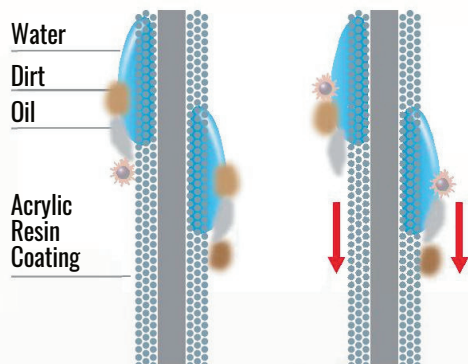

Reduces water and oil formation and prevents dust sticking to the coil units

### Magic Coil acrylic resin coated

Reduces water, oil formation and prevents dust from sticking to the coil of the unit.



### Easy Maintenance

All components are designed for easy maintenance by service personnel.

- Easy to remove drain pan (3 screws)
- Easy to remove L/R louvers (2 screws)
- Easy to remove FCU Fan



# Improved comfort



## 3D Airflow

Improved comfort by distributing powerful and stable air volume in 6 unique airflow patterns. (RAS-18 to RAS-24)

## 6 Airflow patterns

Cooled air flows throughout the room, with highly efficient louver directions.

# IR Remote and Smart APP

## HADA Care

Set louver position to generate indirect air flow to user, with better air distribution to homogenize room temperature.

## 3D Airflow

The unit boasts a 3D smart airflow system, with independent louvers and 6 patterns for greater comfort (only sizes 18. 22 & 24).

## Silent Operation (outdoor unit)


The unique noise reduction function of the outdoor unit minimizes disruption to the neighbourhood.

## Quiet mode (indoor unit)

Press FAN button to adjust speed and reach Quiet Mode to operate at low noise level.

## Weekly timer

Weekly timer allows to set «on and off» times or program settings every 24 hours. Up to 4 different settings/days and 7 different programs in a week.

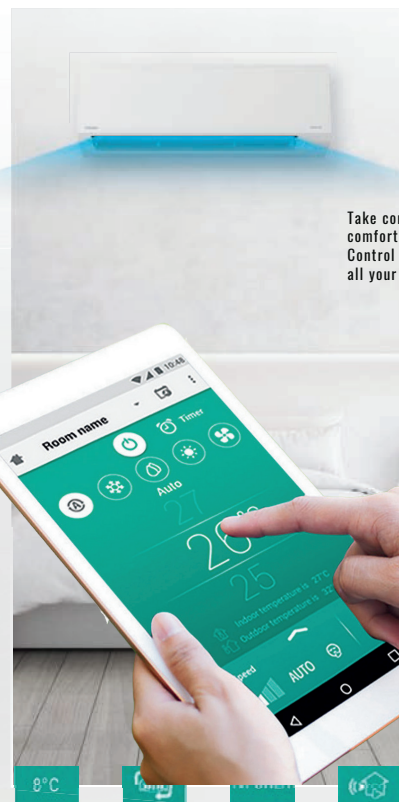

## Smart App

Customise your comfort, finding the perfect cooling or heating level for your family at any time, no matter where you are. When at home, simply replace your infrared remote control with the intuitive smart app. This also gives you easy access to your air conditioner while you are on the move, allowing you to adapt your comfort to lifestyle!

\* Optional Extra





# SHORAI

		RAS-07EKVSG-A RAS-07E2AVSG-NZ	RAS-10EKVSG-A RAS-10E2AVSG-NZ	RAS-13EKVSG-A RAS-13E2AVSG-NZ	RAS-16EKVSG-A RAS-16E2AVSG-NZ	RAS-18EKVSG-A RAS-18E2AVSG-NZ	RAS-22EKVSG-A RAS-22E2AVSG-NZ	RAS-24EKVSG-A RAS-24E2AVSG-NZ
Cooling Capacity - Rated	CO kW	2.00	2.50	3.50	4.20	5.00	6.00	7.10
Cooling Capacity - Range	CO kW	0.80 - 2.80	0.80 - 3.60	0.80 - 4.20	0.80 - 5.00	1.10 - 6.50	1.50 - 7.50	1.50 - 8.20
Power input [rated (min - max)]	CO kW	0.53 (0.19 - 0.84)	0.60 (0.19 - 1.07)	0.85 (0.22 - 1.13)	1.13 (0.25 - 1.56)	1.30 (0.24 - 2.10)	1.57 (0.28 - 2.10)	2.0 (0.30 - 2.60)
Operating current [rated (min - max)]	CO A	2.75 (1.02 - 4.19)	3.05 (1.02 - 5.22)	4.75 (1.35 - 5.50)	5.85 (1.47 - 7.30)	6.60 (1.52 - 10.40)	7.75 (1.68 - 9.75)	9.65 (1.80 - 12.70)
AEER	CO	3.81	4.21	3.98	3.77	3.83	3.77	3.41
Heating Capacity - Rated	RC kW	2.50	3.20	3.70	5.40	5.80	6.90	8.00
Heating Capacity - Range	RC kW	0.70 - 4.00	0.90 - 4.80	0.90 - 5.60	1.30 - 6.20	1.00 - 7.70	1.00 - 8.50	1.70 - 9.20
Power input [rated (min - max)]	RC kW	0.55 (0.17 - 1.28)	0.73 (0.18 - 1.58)	0.82 (0.19 - 1.54)	1.43 (0.24 - 1.92)	1.40 (0.19 - 2.25)	1.69 (0.22 - 2.34)	2.07 (0.30 - 2.40)
Operating current [rated (min - max)]	RC A	2.80 (0.91 - 6.20)	3.65 (0.96 - 7.30)	4.65 (1.14 - 7.30)	6.90 (1.44 - 9.25)	7.00 (1.15 - 10.40)	8.25 (1.37 - 11.25)	9.97 (1.80 - 11.75)
ACOP	RC	4.31	4.47	4.38	3.71	4.05	3.91	3.71
<b>Indoor Unit</b>								
Airflow Volume (High/Mid/Low)	CO m <sup>3</sup> /hr	830/600/390	770/450/300	820/560/360	850/560/360	1120/900/730	1220/950/740	1370/1120/740
Mositure removal	l/hr	0.80	1.30	1.80	2.80	3.20	3.50	4.00
Dimension (WxLxH)	mm	293 x 800 x 226	293 x 800 x 226	293 x 800 x 226	293 x 800 x 226	320 x 1053 x 245	320 x 1053 x 245	320 x 1053 x 245
Net Weight	kg	9	10	10	10	14	14	14
Indoor Noise (H/M+/M/L+/L/Quite) (Cooling) (dB)		42/37/33/29/26/25	42/39/33/29/26/25	45/41/37/33/30/29	47/44/40/36/32/31	45/43/40/37/34/32	46/44/41/38/35/33	49/47/44/41/36/34
Indoor Noise(H/M+/M/L+/L/Quite) (Heating) (dB)		42/38/34/30/26/25	42/39/33/29/26/25	45/41/38/33/31/30	48/45/41/37/33/32	46/43/41/37/34/32	46/44/41/38/35/33	50/46/43/38/35/34
<b>Outdoor Unit</b>								
Dimension (WxLxH)	mm	240 x 660 x 530	290 x 780 x 550	290 x 780 x 550	290 x 780 x 550	290 x 780 x 550	300 x 800 x 630	300 x 800 x 630
Net Weight	kg	22	28	34	34	34	41	41
Cooling Operating range (Outside)	CO °C	-10 ~ 46	-10 ~ 46	-10 ~ 46	-10 ~ 46	-10 ~ 46	-10 ~ 46	-10 ~ 46
Heating Operating range	RC °C	-15 ~ 24	-15 ~ 24	-15 ~ 24	-15 ~ 24	-15 ~ 24	-15 ~ 24	-15 ~ 24
Outdoor Noise (Rated/Quite) (Cooling) (dB)		47/45	48/46	49/47	50/48	53/51	55/53	55/53
Outdoor Noise(Rated/Quite) (Heating) (dB)		50/48	50/48	51/49	52/50	53/51	54/52	55/53
<b>Pipe Size</b>								
Liquid Side	(mm)	6.35	6.35	6.35	6.35	6.35	6.35	6.35
Gas Side	(mm)	9.52	9.52	9.52	12.70	12.70	12.70	12.70
Maximum Piping Length	(m)	15	20	20	20	20	25	25
Maximum Piping Height difference	(m)	12	12	12	12	12	15	15
Chargeless Length	(m)	15	15	15	15	15	15	15
Compressor type		Twin Rotary	Twin Rotary	Twin Rotary	Twin Rotary	Twin Rotary	Twin Rotary	Twin Rotary
Power Supply	V/ph/Hz	220-240V/1Ph/50Hz	220-240V/1Ph/50Hz	220-240V/1Ph/50Hz	220-240V/1Ph/50Hz	220-240V/1Ph/50Hz	220-240V/1Ph/50Hz	220-240V/1Ph/50Hz

