

XGT® **40V** max

PORTABLE DUST EXTRACTION

VC013GL

**MAX SUCTION
POWER
UP
TO** **165W**
15kPa Max. Sealed Suction

**WET/DRY VAC
CAPABILITY**
DUAL-MODE SUCTION FOR ANY JOB

**AWS
COMPATIBLE**
FOR EFFICIENT, WIRELESS DUST
CONTROL ACROSS THE JOBSITE



Makita LXT vs XGT COMPARISON

XGT 40V | 80V_{max}

DVC750L



LXT



VC013GL



XGT



UP TO
**230% MORE
SUCTION POWER**

UP TO
**123% MORE
MAX. SEALED SUCTION**

VC014GL



XGT



MAX. SEALED SUCTION	6.7 kPa	15 kPa	15 kPa
MAX. AIRFLOW AT HOSE	56 CFM (Ø28mm HOSE)	70 CFM (Ø28mm HOSE)	70 CFM (Ø28mm HOSE)
MAX. AIRFLOW AT TURBINE	84 CFM	102 CFM	102 CFM
POWER MODES	2 SPEED DIAL	VARIABLE SUCTION DIAL	VARIABLE SUCTION DIAL
MAX. SUCTION POWER	50W	165W	165W
AWS COMPATIBLE	NO	YES	NO
TANK CAPACITY (DRY / WET)	7.5 / 4.5L	7.5 / 4.5L	7.5 / 4.5L
SOUND LEVEL	76 dBa	75 dBa	75 dBa
WEIGHT (SKIN)	3.9 kg	4.3 kg	4.3 kg
WEIGHT (w BATTERY)	4.6 kg (1x BL1860B)	5.6 kg (1x BL4050F)	5.6 kg (1x BL4050F)
CONTINUOUS USE	72 MIN LOW / 36 MIN HIGH (1x BL1860B)	120 MIN LOW / 22 MIN HIGH (1x BL4050F)	120 MIN LOW / 22 MIN HIGH (1x BL4050F)
VOLTAGE & BATTERY COMPATIBILITY	18V 2.0 – 6.0Ah	40VMAX 2.0 – 8.0Ah	40VMAX 2.0 – 8.0Ah

Makita XGT VACUUM RANGE

XGT 40V | 80V_{max}

VC001GL

VC003GL

VC004GL

VC006GM

VC013GL

VC014GL



MAX. SEALED SUCTION	23 kPa	23 kPa	23 kPa	18 kPa	15 kPa	15 kPa
MAX. AIRFLOW AT HOSE	113 CFM (Ø38mm HOSE)	113 CFM (Ø38mm HOSE)	113 CFM (Ø38mm HOSE)	130 CFM (Ø38mm HOSE)	70 CFM (Ø28mm HOSE)	70 CFM (Ø28mm HOSE)
MAX. AIRFLOW AT TURBINE	148 CFM	148 CFM	148 CFM	173 CFM	102 CFM	102 CFM
POWER MODES	VARIABLE SUCTION DIAL	VARIABLE SUCTION DIAL	VARIABLE SUCTION DIAL	HOSE DIAMETER / VARIABLE SUCTION DIAL	VARIABLE SUCTION DIAL	VARIABLE SUCTION DIAL
MAX. SUCTION POWER	310W	310W	205W	350W	165W	165W
AWS COMPATIBLE	NO	NO	YES	YES	YES	NO
TANK CAPACITY (DRY / WET)	8 / 6L	15 / 12L	15L (DRY ONLY)	40 / 30L	7.5 / 4.5L	7.5 / 4.5L
SOUND LEVEL	70 dBa	70 dBa	70 dBa	70 dBa	75 dBa	75 dBa
WEIGHT (SKIN)	7.4 kg	7.4 kg	7.6 kg	17 kg	4.3 kg	4.3 kg
WEIGHT (BL4050F)	10.0 kg (2x BL4050F)	10.0 kg (2x BL4050F)	10.2 kg (2x BL4050F)	19.6 kg (2x BL4050F)	5.6 kg (1x BL4050F)	5.6 kg (1x BL4050F)
CONTINUOUS USE	220 MIN LOW / 28 MIN HIGH (2x BL4050F IN PARALLEL)	220 MIN LOW / 28 MIN HIGH (2x BL4050F IN PARALLEL)	220 MIN LOW / 28 MIN HIGH (2x BL4050F IN PARALLEL)	80 MIN LOW / 25 MIN HIGH (2x BL4050F IN SERIES)	120 MIN LOW / 22 MIN HIGH (1x BL4050F)	120 MIN LOW / 22 MIN HIGH (1x BL4050F)
VOLTAGE & BATTERY COMPATIBILITY	40VMAX 2.0 – 8.0Ah	40VMAX 2.0 – 8.0Ah	40VMAX 2.0 – 8.0Ah	80VMAX 2.0 – 8.0Ah	40VMAX 2.0 – 8.0Ah	40VMAX 2.0 – 8.0Ah

SPECIFICATIONS

MAX. SEALED SUCTION	15 kPa
MAX. AIRFLOW	70 CFM AT HOSE (Ø28mm HOSE) 102 CFM AT TURBINE
MAX. SUCTION POWER	165W
TANK CAPACITY (DRY / WET)	7.5 / 4.5L
WEIGHT (SKIN)	4.3 kg
WEIGHT (BL4050F)	5.6 kg
CONTINUOUS USE (1x BL4050F)	120 MIN LOW / 22 MIN HIGH

HIGHLIGHTS



AWS DUST EXTRACTION

Enables wireless dust extraction via AWS compatibility for efficient jobsite clean up when connected to an AWS compatible tool



SUCTION POWER

Powerful suction for faster, more efficient cleaning—strong enough to lift three 500ml bottles. (Image for demonstration only. Do not use to lift objects.)



AWS CONNECTION

Compatible with AWS for wireless activation, suction starts automatically with your tool.



AIRFLOW CONTROL

Features variable suction control, main power switch, battery fuel gauge, and a suction force adjustment knob.

FEATURES

POWERFUL SUCTION: Maximum suction power of 165W, representing a 230% increase compared to the DVC750's 50W maximum.

WET AND DRY CAPABILITY: Efficiently handles both wet and dry messes, ensuring versatile cleaning applications.

HEPA FILTER: Equipped with a HEPA filter for superior dust and allergen capture.

SELF-CLEANING SYSTEM: Features a self-cleaning filtration system (with pre-filter and damper only) to maintain optimal performance.

COMPACT DESIGN: Maintains a compact profile for easy maneuverability and storage.

AWS CONNECTION: Compatibility with the Auto-start Wireless System (AWS) allows the user to automatically run the cleaner in sync with the tool's switch operation.



INCLUDED ACCESSORIES



162518-0

HEPA FILTER



199827-4

PRE FILTER &
DAMPER SET



199486-4

SHOULDER BELT



198901-5

AWS CHIP




458891-7

WIDE NOZZLE




458919-1

CREVICE NOZZLE



140G04-3

HOSE SET
28MM x 2M

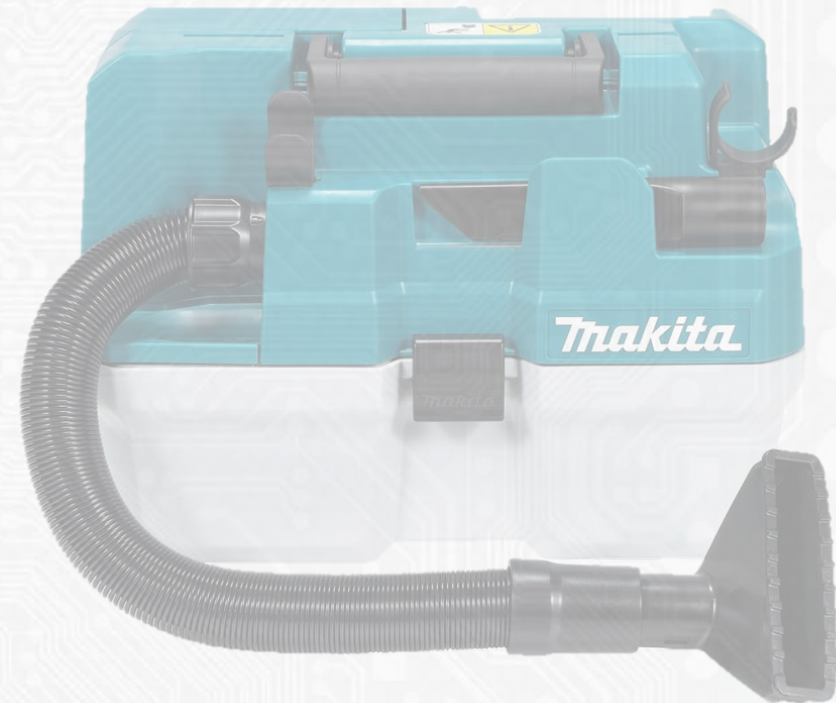

OPTIONAL ACCESSORIES




1915G5-1

4PC CASTER WHEEL SET



1915T3-6

10PC FILTER BAG SET



1915W5-3

10PC PAPER FILTER BAG SET



195432-5

10PC POLY BAG SET



1915T4-4

WET FILTER SET



1915G6-9

HOSE SET 28MM x 5M



191657-9

ROUND BRUSH



195548-6

JOINT 22-38MM

+

+

+



192236-6

TAPERED NOZZLE

FOR FIXED PIPE SET UP



192563-1

38MM STRAIGHT PIPE



192562-3

ANGLED HANDLE PIPE

FOR TELESCOPIC PIPE SET UP



1912G5-3

ANGLED PLASTIC HANDLE PIPE



1912G4-5

38MM ALUMINIUM TELESCOPIC PIPE

FOR TELESCOPIC AND FIXED PIPE SET UPS



195551-7

320MM WET & DRY FLOOR HEAD